

**LEVEL 1 SCREENING
REPORT**

August 2025

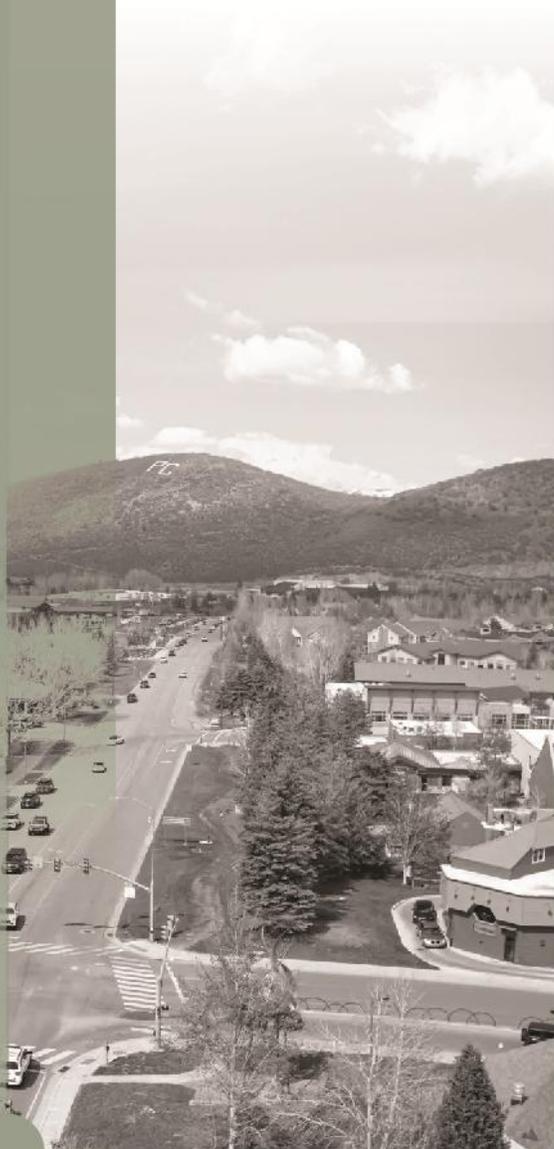


Table of Contents

1 Study Overview	1
1.1 Introduction	1
1.2 Study Area	2
1.3 Report Purpose.....	3
1.4 Recommendation	3
1.5 Previous Purpose and Need Screening Results	4
2 Level 1 Screening Process.....	6
2.1 Alternatives that Advanced into Level 1 Screening	7
Level 1 Screening.....	8
2.1.1 Overview.....	8
2.1.2 Detailed Results.....	11
3 Support for Level 1 Recommendation.....	15
3.1 Stakeholder Working Group	15
3.2 Public Open House.....	16
3.3 Prospector Neighborhood Meeting	17
3.4 City Council Briefing and Discussion	18
4 Next Steps	18
Appendix A: Environmental Screening Memorandum	A
Appendix B: Automated Guideway Transit White Paper.....	B

List of Tables

Table 1. Purpose and Need Screening Results	5
Table 2. Alternatives that Advanced into Level 1 Screening	7
Table 3. Summary of Level 1 Screening Results	10
Table 4. Public Open House Feedback Summary	16
Table 5. Detailed Level 1 Screening Report	19

List of Figures

Figure 1. Re-create 248 Study Area Map	2
Figure 2. Screening Process for Re-create 248.....	3
Figure 3. Alternatives that Did Not Advance to Level 1 Screening	6
Figure 4. Level 1 Screening in the Study Process	6
Figure 5. Level 1 Screening Process.....	7
Figure 6. Neighborhood Feedback on the Study	17

Acronyms and Abbreviations

ADA	Americans with Disabilities Act
AGT	Automated Guideway Transit
BRT	Bus Rapid Transit
CIG	Capital Investment Grant
FTA	Federal Transit Authority
HVT	High Valley Transit
LPA	Locally Preferred Alternative
LRT	Light Rail Transit
MOE	Measures of Effectiveness
NEPA	National Environmental Policy Act
OTTC	Old Town Transit Center
PCMC	Park City Municipal Corporation
PCT	Park City Transit
Rail Trail	Historic Union Pacific Rail Trail
Re-create 248	Re-create 248 Transit Study
ROW	Right-of-way
SWG	Stakeholder Working Group
UDOT	Utah Department of Transportation

1 STUDY OVERVIEW

1.1 INTRODUCTION

Park City Municipal Corporation (PCMC), located in Summit County, UT, in collaboration with the Utah Department of Transportation (UDOT), has initiated the Re-create 248 Transit Study (Re-create 248). The study is aimed at enhancing reliable high-capacity transit service along the SR-248 corridor, Bonanza Drive, and Deer Valley Drive that can be advanced to the next phase of project development: a National Environmental Policy Act (NEPA)-level environmental study and preliminary engineering. This study will identify a locally preferred alternative (LPA) that will include a definition of areas to be served, transit mode/type of transit technology, and logical termini (project limits).

1.2 STUDY AREA

The study area for Re-create 248 is between SR-248 from Quinn’s Junction to Bonanza Drive with a connection to Richardson Flat Park and Ride (Segment 1), Bonanza Drive from SR-248 to Deer Valley Drive (Segment 2), Deer Valley Drive from Bonanza Drive to the Old Town Transit Center (OTTC) (Segment 3), and the Historic Union Pacific Rail Trail (the Rail Trail) from Quinn’s Junction to Bonanza Drive (Figure 1).

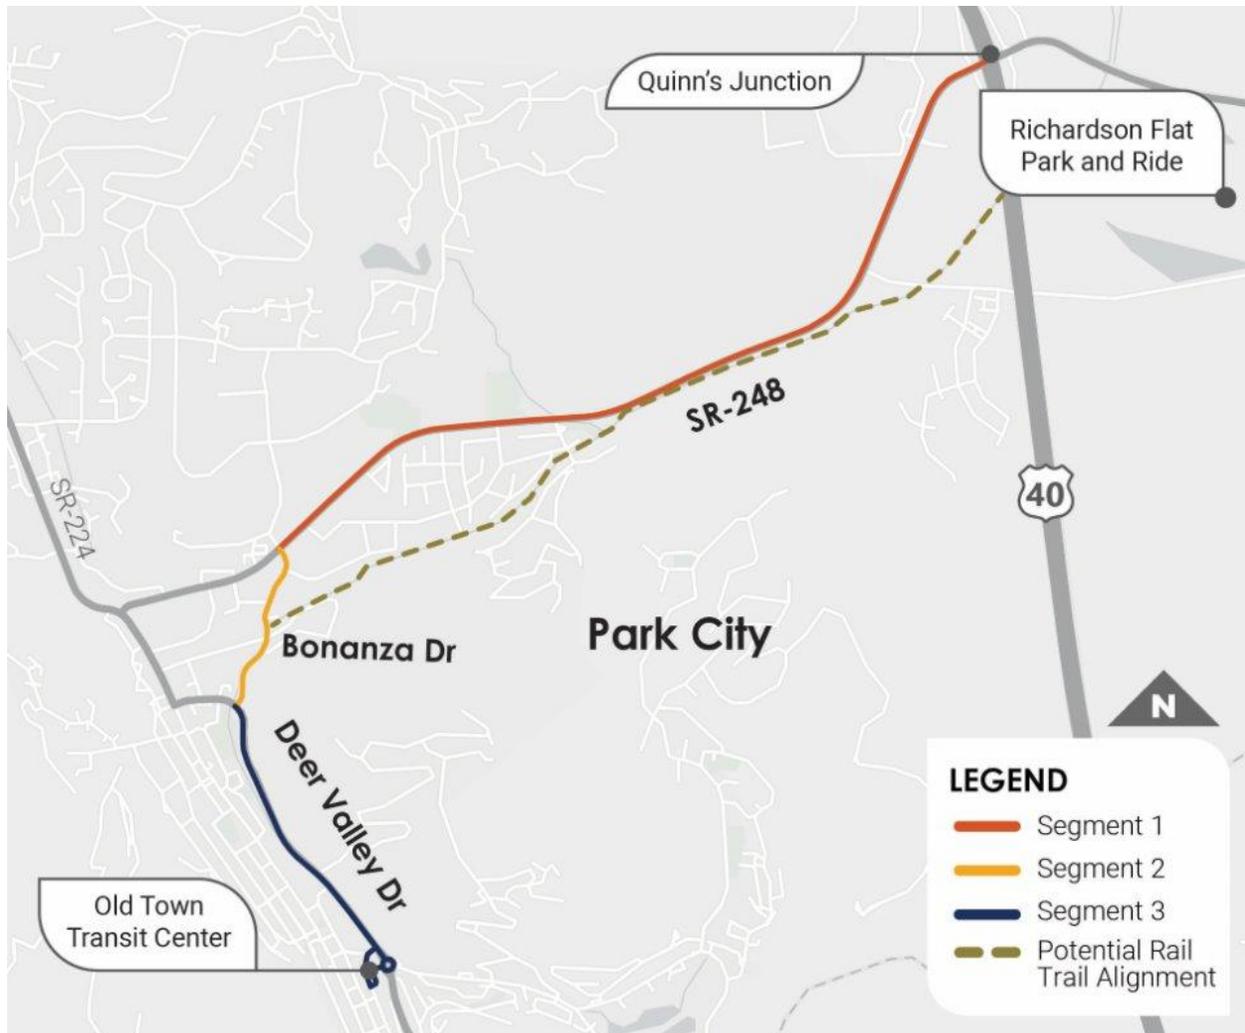


Figure 1. Re-create 248 Study Area Map

1.3 REPORT PURPOSE

This report summarizes the initial Level 1 Screening effort conducted to determine which of the range of viable alternatives best meets the Purpose and Need Statement while minimizing community impacts.

This report describes the:

- Methodology used for evaluating Level 1 transit alternatives
- Level 1 Screening results
- Recommendation for alternatives to be advanced into Level 2 Screening
- Feedback from the Stakeholder Working Group (SWG) and the Public Open House related to the Level 1 Screening results
- Summary of the August 2025 City Council briefing on the Level 1 Screening results

The **Stakeholder Working Group** is comprised of community representatives, elected officials, and technical experts. The SWG engaged at key milestones throughout the process.

The **Public Open House** was held on May 13, 2025, where the Purpose and Need, Range of Alternatives, Purpose and Need Screening, and Level 1 Screening results were shared.

1.4 RECOMMENDATION

Based on the results from the Level 1 Screening analysis, two modes along one alignment will advance into the detailed Level 2 Screening for further design, ridership modeling, and impacts assessment. **Bus Rapid Transit (BRT) with an on-corridor alignment was identified as the highest performing mode in the Level 1 Screening; LRT with an on-corridor alignment was also evaluated and will be advanced to Level 2 Screening for more detailed analysis. The on-corridor alignment performed best** in terms of serving community needs and provided the best access to key destinations on the corridor while also reducing environmental impacts, as compared to the off-corridor Rail Trail alignment also analyzed in Level 1.

Furthermore, Level 1 Screening helps to inform the future study phases (Figure 2) including the Level 2 Screening which will analyze center-running versus side-running service options as well make high level considerations for evaluating reversible transit-only flex lanes to determine if the operational scenario would 1) impact transit reliability and transit travel times and/or 2) refine the transit footprint therefore reducing potential impacts. Transit flex lanes will be a design consideration in a future phase of project delivery.

Additionally, further coordination with UDOT and Park City Transit (PCT) will be conducted to understand if there are other additional refinements needed due to the potential operational

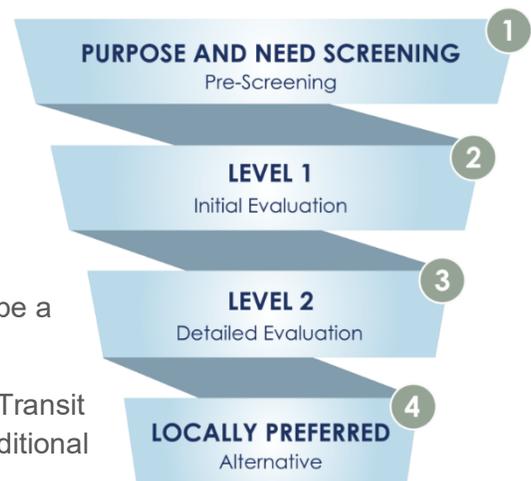


Figure 2. Screening Process for Re-create 248

and right-of-way (ROW) constraints in certain segments of the study area between the Quinn's Junction area and the OTTC.

Details on the Level 1 Screening analysis are described in Section 2.

1.5 PREVIOUS PURPOSE AND NEED SCREENING RESULTS

Level 1 Screening builds off the Purpose and Need Screening, which was completed in fall 2024. An initial range of 12 alternatives were screened to ensure that the alternatives advancing into Level 1 met and addressed the project's Purpose and Need Statement and eliminated any options that did not clearly meet Purpose and Need and/or had fatal flaws likely to prevent successful implementation. The range of alternatives came from previous studies and plans, input from the community, and direction from staff and local leadership. Additional information can be found in the Purpose and Need Screening Report (January 2025). Measures of effectiveness (MOEs) were developed, and each alternative was assessed using a three-scale rating (yes, no, and maybe):

- **Yes** – The mode clearly needs the Purpose and Need and the MOEs
- **Maybe** – The mode may meet the Purpose and Need and MOEs with certain considerations OR additional information and analysis is needed to determine IF the alternative can properly meet the criteria
- **No** – The mode does not meet Purpose and Need or MOEs

The summary of the Purpose and Need Screening is as follows (Table 1):

Table 1. Purpose and Need Screening Results

Alternative	MEASURES OF EFFECTIVENESS							FEAS.
	Does the alternative reduce congestion or reduce travel delay?	Does the alternative provide access to key destinations on-corridor?	Does the alternative reduce transit travel times?	Does the alternative increase on-time performance of transit?	Does the alternative provide reliable transit service on-corridor for the population?	Does the alternative provide high-frequency transit on-corridor with limited road widening?	Does the alternative provide additional travel modes on-corridor in the study area?	
No Action Alternative	Not Screened							
Gondola	Yes	No	Yes	Yes	No	No	No	Yes
One Way Traffic Loop	Yes	No	No	No	No	No	No	Yes
Reversible Flex Lanes	Yes	Maybe	Yes	Yes	Yes	Yes	Yes	Yes
Dedicated Bus Lanes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Light Rail	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes
Automated Guideway Transit	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Rail Trail Transit Alignment	Yes	No	Yes	Yes	No	No	No	Yes
Electric Vehicle Tunnel	No	No	No	No	No	No	No	No
Traditional Widening	Yes	Yes	No	No	No	No	No	Yes
Commuter Rail	Yes	No	Yes	Yes	No	No	No	Yes
Minor Transit Improvements	No	Yes	No	No	No	No	Yes	Yes

Yes ● Maybe ● No ●

The alternatives screened out at this phase included Gondola, One-Way Traffic Loop, Reversible Flex Lanes (with the caveat that reversible flex lanes will be studied for exclusive transit use during this process), Electric Vehicle Tunnels, Traditional Roadway Widening, Commuter Rail, and Minor Transit Improvements (Figure 3). The alternatives screened out were not transit-specific solutions, and/or did not meet the Purpose and Need Statement. Alternatives that advanced into Level 1 Screening met the Purpose and Need or did not have enough data or definition to screen out at this phase, requiring further analysis.



Figure 3. Alternatives that Did Not Advance to Level 1 Screening

2 LEVEL 1 SCREENING PROCESS

The Level 1 Screening (Figure 4 and Figure 5) process was a NEPA-appropriate initial screening process that included developing high-level footprints and general alignment assumptions for the three alternatives (modes) and the two alignments (on-corridor and the off-corridor Rail Trail). The goals of Level 1 Screening were to:

- Evaluate the remaining alternatives that advanced from the Purpose and Need Screening as defined in that report.
- Evaluate and refine the viable alternatives to eliminate those that have the potential to be more impactful on the build or natural environment and that may not serve populations in the study area as well.
- Identify a reduced number of alternatives to advance into the detailed Level 2 Screening effort, which will be forthcoming.

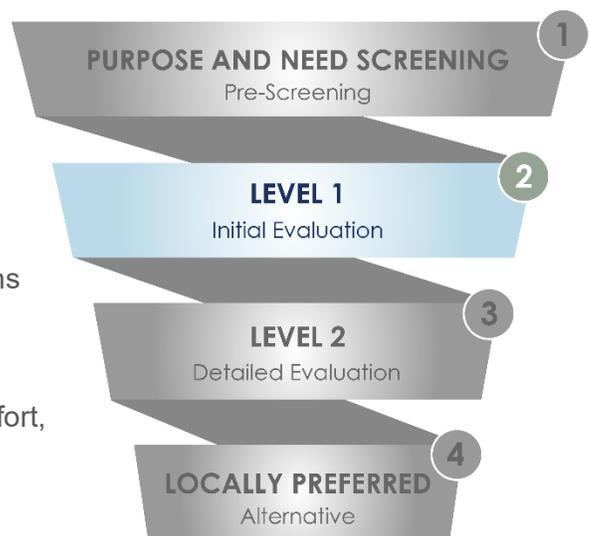


Figure 4. Level 1 Screening in the Study Process

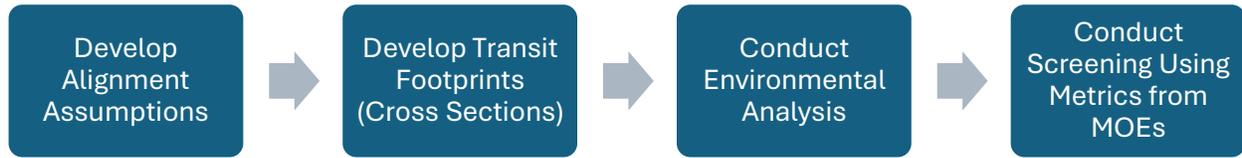


Figure 5. Level 1 Screening Process

2.1 ALTERNATIVES THAT ADVANCED INTO LEVEL 1 SCREENING

The following alternatives advanced into Level 1 Screening as recommended from the Purpose and Need Screening Report. The recommended modes and alignments from that screening are as follows, and found below in Table 2:

- On-corridor alignment (SR-248)
 - Dedicated Bus Lanes/Bus Rapid Transit (BRT)
 - Light Rail Transit (LRT)
 - Automated Guideway Transit/Monorail (AGT)
- Off-corridor alignment (Rail Trail)
 - BRT
 - LRT
 - AGT

An AGT White Paper was developed to further define and evaluate AGT as a mode of public transit for screening purposes, more detail on AGT can be found in Appendix B.

Table 2. Alternatives that Advanced into Level 1 Screening

MODE	DEDICATED BUS LANES	LIGHT RAIL	AUTOMATED GUIDEWAY TRANSIT/MONORAIL
EXAMPLE			
DEDICATED LANES?	Yes – dedicated bus lanes	Yes – electrified guideway	Yes – elevated guideway
PASSENGER CAPACITY	60-90 passengers per bus	120-180 passengers per car	8-80 passengers per car
COMPATIBLE WITH EXISTING SYSTEM?	Yes	No	No
OTHER CONSIDERATIONS?	<ul style="list-style-type: none"> • Recommended as priority project in Park City Forward. • Compatible with High Valley Transit and Park City Transit plans. 	<ul style="list-style-type: none"> • Steep grades and curves may prohibit service. • Requires separate operations and maintenance facility. 	<ul style="list-style-type: none"> • May not be eligible for federal funding. • Requires separate operations and maintenance facility.

LEVEL 1 SCREENING

The Level 1 Screening process focused on determining which alternative(s) best meets the Purpose of the project. The primary Purpose of this project is to:

- Support the transportation demands of population and employment growth and economic resiliency in the region.
- Increase the reliability, access, and overall resiliency of travel on the corridor.
- Enhance the quality of life for people by improving access to opportunities between existing and planned centers, housing, and key destinations.
- Support local and regional plans and policies that address transportation demand management.
- Enhance mobility along the corridor through transportation choices.

Additionally, a **feasibility metric** was identified in the Purpose and Need Screening phase and was carried through into Level 1 Screening. PCMC stakeholders, the public, and elected officials agree it is important to identify, study, design, and construct a transit project on this corridor prior to the 2034 Utah Winter Olympics. The transit service will serve both residents and visitors during this time and will remain a lasting transit investment for the community into the future. The feasibility metric also assessed whether the alternative is:

Feasibility Metric:

- Is it feasible to implement before 2034? Y/N
- Is it a service-proven technology? Y/N
- Is it compatible with the existing regional transit system within the 2034 planning horizon? Y/N

- A service-proven technology as defined by the Federal Transit Authority (FTA).
- Likely to be eligible for future federal funds from FTA.
- Compatible with the existing service and transit authority functions, or if additional facilities, training, vehicles, and design standards would be required to operate the service.

2.1.1 Overview

Table 3 is an overview of the Level 1 Screening results. **Please see Table 5 at the end of this report for the detailed evaluation results including specific metrics and data analysis findings.** This evaluation included primarily qualitative measures that correspond with the Purpose and Need and MOEs as well as additional planning-related factors, such as potential impacts to sensitive environmental resources.

Level 1 Screening is high level and used to illustrate key differences between alternatives based on mode and corridor characteristics and identifies the best performing options. The Level 1

Screening assessed the alternatives using a three-scale rating (high, medium, and low) based on comparative performance between alternatives or level of potential impact(s). For instance:

- **High Performance**– The alternative performs best or better than most other alternatives OR has limited or no potential impacts
- **Medium Performance** – The alternative does not perform distinctly better or worse than other alternatives OR has moderate levels of potential impacts
- **Low Performance** – The alternative performs poorly compared to the other alternatives OR has high levels of potential impacts

Table 3. Summary of Level 1 Screening Results

MEASURES OF EFFECTIVENESS	METRIC	ON-CORRIDOR (SR-248/BONANZA/ DEER VALLEY DRIVE)			OFF-CORRIDOR (RAIL TRAIL)			NO-ACTION ALTERNATIVE
		BRT	LRT	AGT	BRT	LRT	AGT	
Provides access to key destinations on-corridor	Current and future population employment in the proximity to the alignment(s), ¼ mile and ½ mile analyses.	●	●	●	●	●	●	●
Reduction in transit travel times	Average speed considerations based on corridor and mode characteristics.	●	●	●	●	●	●	●
Travel on-time performance	Potential to accommodate exclusive transit operations. Compatibility with local and regional system.	●	●	●	●	●	●	●
Reliable transit on-corridor for low-income and youth populations	Proximity to low-income, youth, and no-car household populations (¼ mile).	●	●	●	●	●	●	●
Provides high-frequency transit on-corridor with limited road widening	Potential for adverse effects on the natural or built environment, and property.	●	●	●	●	●	●	●
Provides additional travel modes on-corridor	Alignment of alternative and proximity to key destinations, ¼ mile analysis.	●	●	●	●	●	●	●
Feasible and service proven?	Feasible to implement by 2034? Y/N. Service-proven tech? Y/N. Forward-compatible? Y/N.	●	●	●	●	●	●	●

Green: High performance and/or low impact

Yellow: Moderate performance and/or moderate impact

Red: Low performance and/or high impact

Based on the Purpose and Need Statement, the evaluation findings from the Level 1 Screening criteria, and a desire to serve the most people in the study area, **the on-corridor alignment will advance** into Level 2 Screening. The Rail Trail alignment was screened out due to its greater distance from serving populations and centers and it did not perform as well as the on-corridor alignment. A major tenet of the Purpose and Need is to provide on-corridor access; the off-corridor alignment does not meet this expectation or provide the same access. **BRT and LRT will advance into Level 2 Screening**; there is a desire to be actionable by 2034, therefore, AGT was screened out due to the fact there are no vehicles, facilities, or trained staff to operate, maintain, and make design exceptions for the rail-based mode at this time. AGT was also screened out due to the uncertainty of the ability to obtain federal funds for this mode (due to ambiguity on its ability to be a service proven technology according to FTA) and uncertainties of manufacturing lead times and the ability to meet federal Buy American manufacturing requirements.

2.1.2 Detailed Results

This section provides detailed descriptions of key findings for each MOE. Table 5 at the end of this report presents the Level 1 evaluation findings in detail, including specific data points tied to each of the metrics listed in Table 3 above.

Based on the analysis presented below, BRT and LRT with an on-corridor alignment are recommended to advance to the next phase of study, Level 2 Screening.



Measure of Effectiveness: Provides access to key destinations on-corridor

The on-corridor alignment performs best compared to the off-corridor alignment due to its ability to service current and future populations, employment centers, affordable housing complexes, the Park City School District, and medical care facilities in the study area. Because these destinations are primarily located on SR-248, Bonanza Drive, and in Old Town Park City, an on-corridor alignment provides greater access over the Rail Trail (off-corridor) alignment. Additionally, there are higher concentrations of populations adjacent to SR-248 than the Rail Trail, indicating the on-corridor alignment would serve more passengers.

The off-corridor Rail Trail alignment would not provide access for as many members of the population as the on-corridor alignment, which is more proximal to people, destinations, and connections to other transit services.

The on-corridor versus off-corridor performance analysis is the same for each mode.

Measure of Effectiveness: Reduction in transit travel times

Specific to the mode options, LRT and AGT have potential operational challenges compared to BRT, with lower speeds than desired for a high-capacity transit route in this study area. Potential station spacing in this environment would limit operational speeds, and from a travel time perspective, may not compete well with driving. These two rail-based services also require certain specifications for turning radii, which are wider than those of buses, creating a larger footprint and slower turning speeds. Horizontal curves and grade changes on Bonanza Drive and Deer Valley Drive would also limit the operating speed of rail-based service. The current curvature and grades of Bonanza Drive do not meet UDOT's Light Rail Manual of Instruction minimum standard design criteria for LRT but could potentially qualify for exceptions from the transit authority.

The off-corridor Rail Trail alignment is attractive for operational travel time considerations due to assumed operational efficiencies with fewer intersections and signals and reduced conflicts with other roadway users for a portion of the alignment. However, passengers may need to walk farther to their destinations from the stations, and the service would still need utilize Bonanza Drive and Deer Valley Drive to the west and south within the study area.

Measure of Effectiveness: Travel on-time performance

Transit travel times and transit reliability considerations were taken from industry standards for these modes (i.e., top speeds for each mode, generally) and the ability for the alternative to operate in exclusive ROW. At this phase, all modes were determined to be able to meet this criteria by assuming they would operate in dedicated transit guideways for both on- and off-corridor alignments.

Measure of Effectiveness: Reliable transit on-corridor for low-income and youth populations

The on-corridor alignment is more proximal to higher concentrations of the population. The demographic and socioeconomic analysis conducted determined that an on-corridor alignment provides access to a larger subset of low-income and youth populations than an alignment on the Rail Trail. Six of the census block groups within a ¼ mile of SR-248 have youth populations around 20% of the total population, compared to only three census block groups along the Rail Trail. See Table 5 at the end of this report for details.

Measure of Effectiveness: Provides high-frequency transit on-corridor with limited road widening

Preliminary design footprints were developed and used to conduct a desktop environmental analysis to determine to what level the alternatives may have potential adverse effects on the natural and/or built environment. The on-corridor alignment was determined to be less impactful from an environmental standpoint, primarily because it had minimal impacts to wetlands and the built environment. The off-corridor alignment indicated potential adverse impacts to wetlands and other environmental resources, and depending on mode, may impact the built environment more at the Bonanza Drive and SR-248 intersection. See Appendix A for the Environmental Screening Memorandum.

All footprints on roadway corridors follow the alignment of the corridor and are based on UDOT's Light Rail Manual of Instruction and UDOT's Bus Rapid Transit Manual of Instruction standards for lane widths, track widths, and buffer widths, along with desirable minimum curve radii where new curves are introduced. Some existing horizontal curves on certain alignments do not meet the desired minimum.

The footprints on the Rail Trail alignment are based on assumed desirable widths with some guidance from the UDOT manuals for required separation between the Rail Trail pathway and the transit service.

The footprints are "high level," created by offsetting the edges of pavement or backs of sidewalks to determine the footprint boundary evenly on each side. Minimal design and engineering were conducted to lay out lanes throughout the corridors. Design refinements can be made to reduce and/or alter the footprints to avoid issues to some extent.

The PCMC community has expressed that road widening is unfavorable for congestion management but may be accepted in certain locations to allow for dedicated transit service. An on-corridor alignment has fewer widening implications than the Rail Trail corridor. The off-corridor footprints assumed a cross-section that included rebuilding the recreational Rail Trail parallel to the transit service, ensuring it would still provide multi-use recreational and transportation connections for non-motorized trail users, which resulted in an overall wider footprint.

Measure of Effectiveness: Provides additional travel modes on-corridor

At this high-level stage, all modes utilizing the on-corridor alignment of SR-248 were determined to be able to meet this criterion of providing travel modes on-corridor. The off-corridor alignment does not meet this MOE for the portion utilizing the Rail Trail section, since it is not an on-corridor alignment.

Measure of Effectiveness: Feasible and service proven?

Feasible: Refers to whether a potential project is implementable within the parameters set up by the local agency. In this instance, can the service be realized and in operation prior to the 2034 Utah Winter Olympics? Several factors go into this feasibility metric, including whether the local agency can either fund the project solely with local funds in the timeframe allotted or secure enough federal and/or state funds to execute the service in this timeframe. Additionally,

lead times for manufacturing buses, trains, or other service vehicles as well as operations and maintenance facilities must be considered. FTA's Buy America requirements dictate that domestically manufactured products and construction materials should be prioritized. This applies to transportation and transit infrastructure like roads, bridges, and transit systems and materials like iron and steel. Vehicles and other transit infrastructure must be obtainable from U.S. manufacturers or it must be proven that no other reasonable alternative can be found in the United States to utilize foreign materials. Additionally, trains have longer lead times for building compared to buses; buses have more options for Buy America standards.

Providing a high-frequency and high-capacity transit service on SR-248 with the ability to connect into the regional transit network within the next 8-10 years is also a key feasibility consideration as this study evaluates and ultimately identifies an LPA. PCT and High Valley Transit (HVT) both operate bus-based public transit in the study area. Both agencies are equipped to operate bus service and on-demand micro transit service using shuttles and vans. Their current operations and maintenance facilities, mechanics, and operating staff are trained exclusively on the bus systems. Due to the existing bus maintenance and operational infrastructure, a BRT system would be easier to implement in the corridor than LRT or AGT systems.

Service Proven: Refers to fixed route transit service, including modes like buses, trains, or commuter rail/subways, that are publicly funded and regularly operated. Service proven technologies have a track record of reliable service and are often funded by the federal government due to their reliability and historic successes. BRT and LRT are deemed service proven by the FTA, and there are many historical examples of FTA funding these transit systems. FTA has provided a statement that AGT, defined as monorail for this evaluation, services may be evaluated on a case-by-case basis for eligibility for use of Capital Investment Grant (CIG) funds to construct, and while there are a few examples of FTA-funded monorail systems in the United States, they have not been consistently funded at the federal level and not in recent years.

Research on past and existing monorail systems in the United States reveals that only two out of eight systems received FTA funds for initial construction. The latest system to receive FTA funding is located in Honolulu, HI, and is currently under construction. The estimated cost of this system is \$8 billion, and the FTA has provided \$1.55 billion in funds, with the project now in the planning and early construction phases, spanning over 20 years. The second system to receive FTA funding is located in Jacksonville, FL, and was constructed in 1989. The cost was \$183 million, and the FTA (then known as UTMA) granted \$23.5 million in funds. The monorail system in Seattle, WA, was privately funded at the time of construction; however, in 2022, the FTA granted \$15 million in funding for Americans with Disabilities Act (ADA) accessibility updates. Funding LRT or AGT solely using local funds is likely unfeasible in the timeframe available to implement service prior to the 2034 Winter Olympics. See Appendix B, Automated Guideway Transit Memorandum, for additional information.

In summary, BRT and LRT are considered service proven technologies as FTA and PCMC defines them. AGT may be considered on a case-by-case basis but proves riskier for the timeline and funding requirements of this mode.

3 SUPPORT FOR LEVEL 1 RECOMMENDATION

3.1 STAKEHOLDER WORKING GROUP

The SWG met on April 2, 2025, to receive updates on existing and future conditions, the development of Purpose and Need, and the Purpose and Need Screening findings. The SWG provided constructive feedback as representatives of the community or on behalf of the organizations they were attending on behalf of. The main themes of this group were:

- **A desire for durable decisions.**
 - The group expressed concern over ensuring a decision could be made quickly and could withstand the test of time, especially as the November 2025 election approaches.
 - Stakeholders had concerns over selecting a complex mode or an alternative that is not service proven, worrying it would be harder to find consensus and project owners to advance it.
 - Questions were asked regarding who the decision-makers were and who would champion this future project in the long term.
- **Concerns regarding the off-corridor alignment.**
 - Concerns around noise, vibration, ROW impacts, and impacts to open space were voiced. Members of the group expressed that utilizing the Rail Trail would negatively impact the Park City Heights clubhouse and residents in the Prospector neighborhood.
 - Concerns regarding access to key destinations, such as the Park City School District campus, were also expressed.
- **Interest in advancing BRT and LRT and an on-corridor alignment.**
 - The group was supportive of the BRT alternative due to its compatibility with the existing transit system and user experience.
 - Additionally, stakeholders viewed this as a positive option in terms of meeting the feasibility metric.
 - Some members of the group voiced support for LRT as the best option, wanting to ensure the project could accommodate future growth and was responsive to the desire for a regional rail or high-capacity transit network from Salt Lake County into Summit and Wasatch Counties.
 - Additionally, concerns over noise, open space, and community context impacts with the Rail Trail alignment were expressed.

3.2 PUBLIC OPEN HOUSE

The Re-create 248 study team participated in PCMC’s Spring Projects Open House on May 13, 2025. The study team hosted a section of the open house for members of the public to meet the study team, learn about the study’s Purpose and Need, and provide feedback on the range of alternatives and the fatal flaw screening results. Attendees were given a pamphlet to document comments and feedback while they visited each of the five stops:

1. Study Overview
2. Purpose and Need
3. Range of Alternatives and Purpose and Need Screening Results
4. Level 1 Evaluation Summary
5. Next Steps

A total of 31 individuals attended the Re-create 248 section of the open house, and 13 public comment cards were received and documented (see Table 4).

Table 4. Public Open House Feedback Summary

TOPIC	NUMBER OF COMMENTS	THEME	DESCRIPTION
STOP 1 – STUDY OVERVIEW Do you have any feedback on this process?	5	Positive Study Support	The comments reflect a positive reception to the study’s objectives and methodology. Comments included excitement and support over high-capacity transit on SR-248 and a desire to implement something quickly and efficiently.
STOP 2 – PURPOSE AND NEED Do the Purpose and Need capture the vision for mobility on this corridor and in Park City?	4	General Agreement	Several attendees responded positively, suggesting that there is a baseline agreement with the Purpose and Need as presented.
	1	Accessibility and Convenience	One commenter emphasized that the proximity of bus stops is crucial for encouraging public transit use, particularly for individuals in ski boots, suggesting that closer bus stops would enhance ridership.
STOP 3 – RANGE OF ALTERNATIVES AND PURPOSE AND NEED SCREENING RESULTS Do you have any feedback on the Purpose and Need Screening process or the alternatives that were advanced into Level 1?	4	Questions About Flex Lanes and Alternatives Screening	Attendees expressed confusion over why flex lanes for vehicles were not advanced and sought clarity on the criteria used for eliminating certain alternatives.
	2	Dedicated Bus Lane Preference	Two participants expressed a preference for dedicated bus lanes over other modes. Many participants expressed an interest in just advancing a transit solution quickly.

TOPIC	NUMBER OF COMMENTS	THEME	DESCRIPTION
STOP 4 – LEVEL 1 EVALUATION Which of the three modes fits best with the community context in Park City?	10	Strong Support for Dedicated Bus Lanes	Multiple comments emphasized a preference for dedicated bus lanes as the primary mode of transit, highlighting their importance for effective service.
	2	General Support for LRT	Some attendees expressed interest in LRT and suggested starting with a dedicated bus service to create opportunities for future rail connections. Some concerns about the noise impacts of LRT were expressed.
STOP 4 – LEVEL 1 EVALUATION SUMMARY Which alignment do you prefer (Rail Trail or SR-248)?	7	Strong Preference for SR-248	Comments expressed a clear preference for the SR-248 alignment, with attendees emphasizing their support for this option over the Rail Trail alignment.
	4	Rail Trail Dissent	Some participants expressed dissent for the Rail Trail, citing concerns about safety, wildlife, access and preservation of open space, view sheds, and quality of life. Comments were made about the trail's vital role as a recreational space that preserves Park City's identity.
STOP 5 – NEXT STEPS What should we consider as we advance our evaluation?	7	Various Consideration Requests	The following topics were requested to be considered: <ul style="list-style-type: none"> Community values and aesthetic Publicizing the council's decisions regarding BRT, LRT, and the next steps, including details on ROW studies and cost considerations Add ski locker buildings to Park & Ride to incentivize bus use Complete engineering analysis of bus lanes

3.3 PROSPECTOR NEIGHBORHOOD MEETING

PCMC and study team met with the Prospector Neighborhood, the community that is adjacent to SR-248 on the south side of the corridor, on August 5, 2025, to share the preliminary Level 1

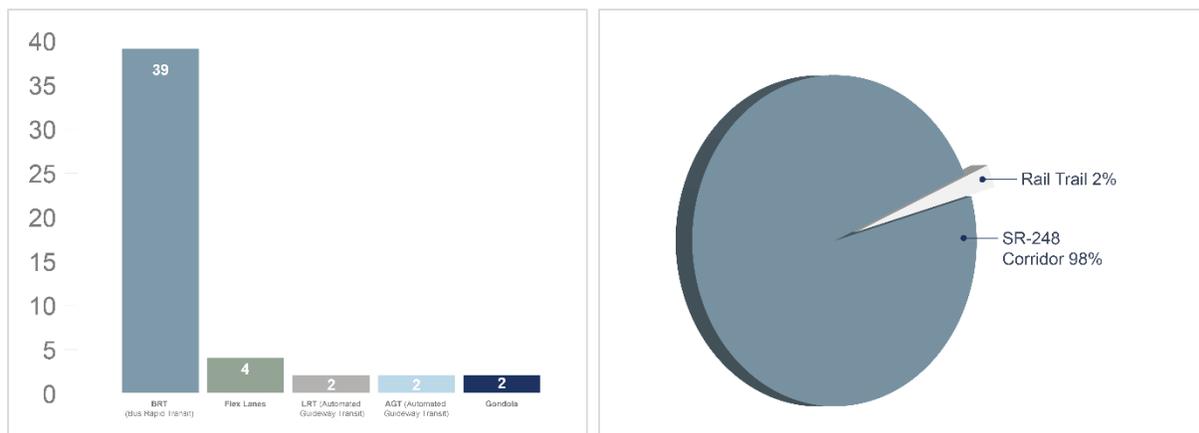


Figure 6. Neighborhood Feedback on the Study

Screening findings and discuss concerns and opportunities around the potential transit alignments. Approximately 80 residents attended, and 49 comment forms and 41 emails were collected. Community members expressed a strong desire for BRT and an on-corridor alignment as illustrated in Figure 6 below.

3.4 CITY COUNCIL BRIEFING AND DISCUSSION

On August 14, 2025, the study team briefed the City Council on the evaluation findings of Level 1 Screening, answered questions, and received guidance on the next steps for evaluating alternatives in Level 2. City Council members were all supportive of advancing the on-corridor alignment, eliminating the Rail Trail alignment, and focusing on BRT. Some Council members also expressed interest in advancing LRT to better understand some key data points like ridership potential and costs. It was also confirmed that AGT did not evaluate favorably enough to advance into Level 2 Screening.

4 NEXT STEPS

The Level 2 Screening will provide greater definition to each alternative, including service frequency assumptions, station locations, and specific alignment details, and will result in the selection of a Locally Preferred Alternative (LPA). Modifications will be made to the on-corridor BRT and LRT alternatives in Level 2. A detailed design exercise and ridership and operational analysis will be conducted. Station locations and their potential impacts will be determined. Center- versus side-running cross sections will be developed and refined. Reversible flex lanes for BRT will be evaluated to determine feasibility and potential benefits and constraints.

Additional screening metrics will be utilized in the Level 2 Screening process to determine which potential alternative will best align with FTA's CIG program and to determine eligibility and competitiveness for future federal funds. The previously defined MOE of 'corridor operations' will also be evaluated in Level 2 with detailed traffic analysis, and future BRT and LRT service will be assessed to determine how it may impact corridor operations and the potential influence that center- or side-running BRT with and without flex lanes has on travel delay and transit travel times.

Once the LPA is selected, findings will be presented to the public and the project will move into the next phase: environmental study and documentation and preliminary design.

Table 5. Detailed Level 1 Screening Report

Screening Criteria (MOEs)	METRIC	ON-CORRIDOR ALTERNATIVES (SR-248, BONANZA DRIVE, DEER VALLEY DRIVE)			OFF-CORRIDOR ALTERNATIVES (RAIL TRAIL, BONANZA DRIVE, DEER VALLEY DRIVE)			NO ACTION ALTERNATIVE (Not scored – provided for comparative purposes)
		BRT	LRT	AGT	BRT	LRT	AGT	
Provides access to key destinations on-corridor	Current and future population and employment in proximity to the alignment(s), ¼ mile.	High Performance			Medium Performance			Current and future population and employment in proximity to the alignment(s) would grow as shown under the alternatives.
		Year	Population	Employment	Year	Population	Employment	
		2025	6,523	17,828	2025	5,568	15,847	
		2050	7,318	22,390	2050	7,899	18,794	
Reduction in transit travel times	Average speed considerations based on corridor and mode characteristics.	<p>High Performance</p> <p>Max speed of 75 mph.</p> <p>Assume a travel speed between 35-50 mph, in line with community context.</p> <p>Station spacing and signal priority will influence travel times.</p>	<p>High Performance</p> <p>Max speed of 55 mph.</p> <p>Assume a travel speed between 35-50 mph, in line with community context.</p> <p>Station spacing and signal priority will influence travel times.</p>	<p>High Performance</p> <p>Max speed of 65 mph.</p> <p>Assume a travel speed between 35-50 mph, in line with community context.</p> <p>Station locations and signal priority will influence travel times.</p>	<p>High Performance</p> <p>Max speed of 65 mph.</p> <p>Assume a travel speed between 35-50 mph, in line with community context.</p> <p>This alignment has an assumed benefit that no signalization will impede transit reliability, and no potential for conflicts with broken-down vehicles in shoulders.</p>	<p>High Performance</p> <p>Max speed of 55 mph.</p> <p>Assume a travel speed between 35-50 mph, in line with community context.</p> <p>This alignment has an assumed benefit that no signalization will impede transit reliability, and no potential for conflicts with broken-down vehicles in shoulders.</p>	<p>High Performance</p> <p>Max speed of 65 mph.</p> <p>Assume a travel speed between 35-50 mph, in line with community context.</p> <p>This alignment has an assumed benefit that no signalization will impede transit reliability, and no potential for conflicts with broken-down vehicles in shoulders.</p>	Existing transit speeds would remain as is which are in line with community context.

Screening Criteria (MOEs)	METRIC	ON-CORRIDOR ALTERNATIVES (SR-248, BONANZA DRIVE, DEER VALLEY DRIVE)			OFF-CORRIDOR ALTERNATIVES (RAIL TRAIL, BONANZA DRIVE, DEER VALLEY DRIVE)			NO ACTION ALTERNATIVE (Not scored – provided for comparative purposes)
		BRT	LRT	AGT	BRT	LRT	AGT	
Transit on-time performance	Potential to accommodate exclusive transit operations? Y/N.	High Performance Y	Medium Performance Y	Medium Performance Y	High Performance Y	Medium Performance Y	Medium Performance Y	Y
	Compatible with existing system? Y/N.	Y	N	N	Y	N	N	N/A
Reliable transit on-corridor for low-income and youth populations	Proximity to current low-income, youth, and no-car household populations (¼ mile analysis).	High Performance The on-corridor alignment provides ¼-mile access to census tract 9643.08 with a 9.4% low-income rate census tract 9644.02 with a 3.4% low-income rate. It also provides ¼-mile access to five census tract block groups that have no-vehicle households. One block group has 6% no-vehicle households, two block groups are 5% no-vehicle households, one block group is 3%, and one is 2%			Medium Performance The off-corridor alignment provides ¼-mile access to census tract 9643.08 with a 9.4% low-income rate census tract 9644.02 with a 3.4% low-income rate. Compared to the on-corridor alignment, the rail trail provides less access to the census tract with the 9.4% low-income rate. It also provides ¼-mile access to three census tract block groups that have no-vehicle households. One of these block groups has 6% no-vehicle households and two block groups have 5% no-vehicle households.			Proximity to current low-income, youth, and no-car household populations would remain the same as shown under the on-corridor alternatives; however, without action, these populations have less opportunity to utilize public transit.
		High Performance Six of the block groups within a ¼ mile of the on-corridor alignment have youth populations (under 18 years old) hovering around 20% of the total population. There are two at 21%, one at 20%, two at 19%, and one at 17%.			Medium Performance Three of the block groups within a ¼ mile of the rail off-corridor alignment have youth populations (under 18 years old) hovering around 20% of the total population. One is 21%, one is 20%, and one is 19%.			No change from current conditions.

Screening Criteria (MOEs)	METRIC	ON-CORRIDOR ALTERNATIVES (SR-248, BONANZA DRIVE, DEER VALLEY DRIVE)			OFF-CORRIDOR ALTERNATIVES (RAIL TRAIL, BONANZA DRIVE, DEER VALLEY DRIVE)			NO ACTION ALTERNATIVE (Not scored – provided for comparative purposes)
		BRT	LRT	AGT	BRT	LRT	AGT	
Provides high-frequency transit on-corridor with limited road widening	Potential for adverse effects on the natural environment.	Medium Performance This alternative potentially impacts approximately 0.29 acres of wetlands and ~479 linear feet of streams. BRT may require 2 commercial relocations.	Medium Performance This alternative potentially affects ~0.20 acres of wetlands and ~454 linear feet of streams. LRT may require 4 commercial relocations.	High Performance This alternative shows no impact to wetlands or streams. AGT may require 2 commercial relocations.	Medium Performance This alternative potentially impacts ~1.5 acres of wetlands and 4,071 linear feet of streams. BRT may require 1 commercial relocation.	Low Performance This alternative potentially impacts ~3.3 acres of wetlands and ~4,237 linear feet of streams. LRT may require 2 commercial relocations.	Low Performance This alternative potentially impacts ~3.4 acres of wetlands and ~3,697 linear feet of streams. AGT likely requires no commercial relocations.	No new impacts on the natural environment.
	Potential for adverse effects on the built environment and property. <i>See Appendix A for more details on potential impacts.</i>	High Performance The alignment remains mostly in the existing ROW.	Medium Performance The alignment remains mostly in the existing ROW with the exception of wider turning radii required at intersections.	Low Performance This alignment expands the ROW footprint of the study corridor the most and affects the most parcels.	Medium Performance Potential for further impacts by the need to make connections to/from the trail to origins and destinations.	Medium Performance Potential for further impacts by the need to make connections to/from the trail to origins and destinations.	Medium Performance Potential for further impacts by the need to make connections to/from the trail to origins and destinations.	No new impacts to the built environment.
Provides additional travel modes on-corridor	Alignment of alternative and proximity to key destinations, ¼ mile.	High Performance Compared to the on-trail alternatives, the on-corridor alignment provides closer, and more, connections to top destinations including the Snow Creek Market Place and Instacare health clinic. There are 18 high-density, affordable housing developments within a 1/4-mile of the corridor alignment.			Medium Performance The Rail Trail alignment is further away from top destinations that are located along the SR-248 corridor. There would be less direct connections to destinations like the Fresh Market Plaza, Snow Creek Market Place, and Park City High School. There are 16 high-density, affordable housing developments within a 1/4 mile of the alternative alignments.			Alignment and proximity to key destinations would remain the same.

Screening Criteria (MOEs)	METRIC	ON-CORRIDOR ALTERNATIVES (SR-248, BONANZA DRIVE, DEER VALLEY DRIVE)			OFF-CORRIDOR ALTERNATIVES (RAIL TRAIL, BONANZA DRIVE, DEER VALLEY DRIVE)			NO ACTION ALTERNATIVE (Not scored – provided for comparative purposes)
		BRT	LRT	AGT	BRT	LRT	AGT	
Feasible / Service-Proven Technology	Is this alternative feasible to implement by 2034? Y/N.	High Performance	Medium Performance	Low Performance	High Performance	Medium Performance	Low Performance	N/A
	Is this a service-proven technology? Y/N.	Y	Y	N	Y	Y	N	N/A
	Forward compatible with regional plans? Y/N.	Y	Y	N	Y	N	N	N/A
Stakeholder and Public Feedback (Not used formally in the evaluation)	Meeting and open house feedback.	Broad support for this; it is compatible with the existing system, and seems most attainable to execute.	Some support for this; concerns over the cost of LRT in the short time frame.	Little support for this; concerns over viewshed, cost, and that it appears as a 'novelty idea' and not a transit service.	Concerns over impacts to the communities adjacent to the Rail Trail.			No specific comments were captured related to the No Action Alternative.

APPENDIX A: ENVIRONMENTAL SCREENING MEMORANDUM

APPENDIX B: AUTOMATED GUIDEWAY TRANSIT WHITE PAPER